HA PREMIER

DIGI POWER

QuickZoom

HA16x6.3BE RM/RD*

ACCESSORIES: HD & SD ENG/EFP

THREE-MODE FINE FOCUS

By shifting the sensitivity from the wide side to the telephoto side of the focus range, this control provides more precise focusing for studio or sports productions.



SERIAL DIGITAL REMOTE CONTROL BY PC

Remote control of zoom, focus and iris for Digipower lenses is possible via serial digital link, providing accurate positioning for virtual studio and other applications requiring digital precision.



DIGI ZOOM DEMAND*

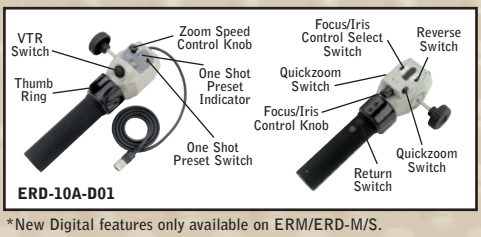

*New Digital features only available on ERM/ERD-M/S.

A. CFC-990 Flex Cable
B. FMM-3B/6B Manual Module
C. ZMM-6 Manual Module
D. EBF-1 Focus Cable
E. MCA-6
F. ERD-20A-A02 Zoom Demand
G. FSP-13G Focus Positional Module
H. EPD-4A-E02
I. CZH-14 Focus Handle
J. CFH-11 Focus Handle
K. MCA-7 Mounting Clamp
L. EPD-20A-A01/A02 Focus Demand
M. ERD-10A-D01 Zoom Demand
N. ALH-117A-02A Support for HA36x/A36x HA42x

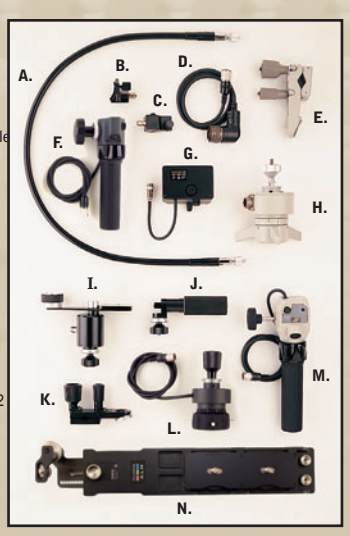

Note: ERD-20A-A02 (F) and EPD-20A-A02 (L) replace the ERD-T22 and EPD-2CA.

DIGI POWER REAR CONTROL KITS

MS-11D Manual Focus/Servo Zoom
For use with RM/ZM type lenses.



SS-11D Servo Focus/Servo Zoom
For use with RM/ZM type lenses.



SS-13D Servo Focus/Servo Zoom
For use with RD/ZD type lenses.



SS-14S Servo Focus/Servo Zoom
For use with RD/ZD type lenses.

[redacted]

STANDARD REAR CONTROL KITS

MS-11 Manual Focus/Servo Zoom



SS-11 Servo Focus/Servo Zoom
Not available on HA42x, HA36x and A36



SS-13A Servo Focus/Servo Zoom
For use with ERD type lenses.

[redacted]

MM-11 Manual Focus/Manual Zoom
Not available on HA42x, HA36x and A36x



*Specify camera type
**FMM-3C for use on HA36x, HA42x and HA25x

MOUNTING SYSTEM

Fujinon has replaced the "cone" shaped mounting system with the "tooth" system. The cone type may still be ordered as a special order.

New Style
MCA-7

Old Style
MCA-1A
(Discontinued)

ACCESSORIES: HD ENG/EFP

LENS CONVERTERS

Wide Converter
(WCV)

Tele Converter
(TCV)

HD/ENG LENS CONVERTERS

	Converted	M.O.D.	Weight
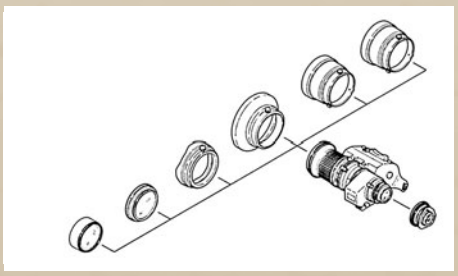
*TCV/WCV are zoom thru type **ø 95mm P-1 screw on type
Wide attachement and fisheye attachment can be used at WIDE END.
Number of M.O.D. is at wide end.