

JK Audio

innkeeper 1x Digital Hybrid User Guide



Telephone Interface Products

Introduction

Innkeeper 1x will allow you to send and receive audio over analog telephone lines. While this may seem like a simple task that any telephone can do, the challenge is getting the best quality audio from such a miserable audio path.

What is a Digital Hybrid?

A digital hybrid connects audio signals to a standard analog telephone line without the variations in quality found with analog hybrids. The main function of a hybrid is to bring in the callers voice from the phone line, as clear and clean as possible. In the real world, when you send your voice down the telephone line it has a tendency to bleed over into the callers audio. The hybrid must adapt to the phone line in order to properly separate transmit and receive audio. We use a 16 bit DSP to continuously monitor the phone line and audio signals to deliver excellent separation. Our dual-convergence algorithm can achieve excellent trans-hybrid loss, typically exceeding 50 dB, without any setup.

Ready to go?



The innkeeper controls and connectors are clearly marked and ready for operation. The Feature diagram will help you pinpoint any minor questions that you may have. If this is your first exposure to a hybrid, we suggest that you read the entire manual to allow you to take advantage of all these features.

Any Questions?

Before you pick up the phone... Please thumb through the rest of this manual. You might find those deep technical questions are covered on later pages.

Features

Front View

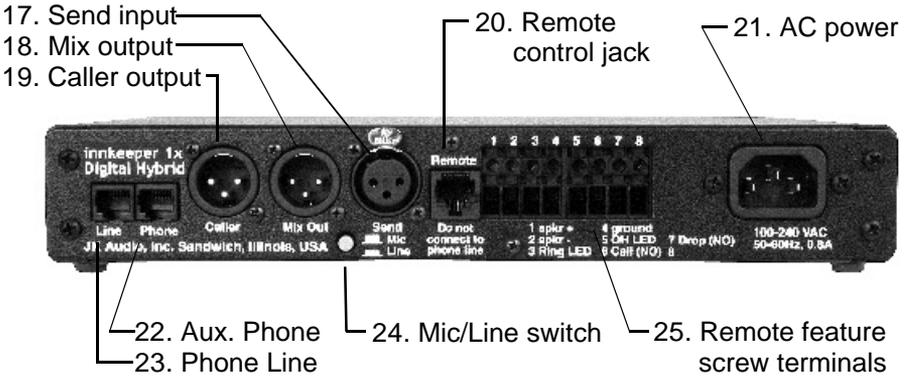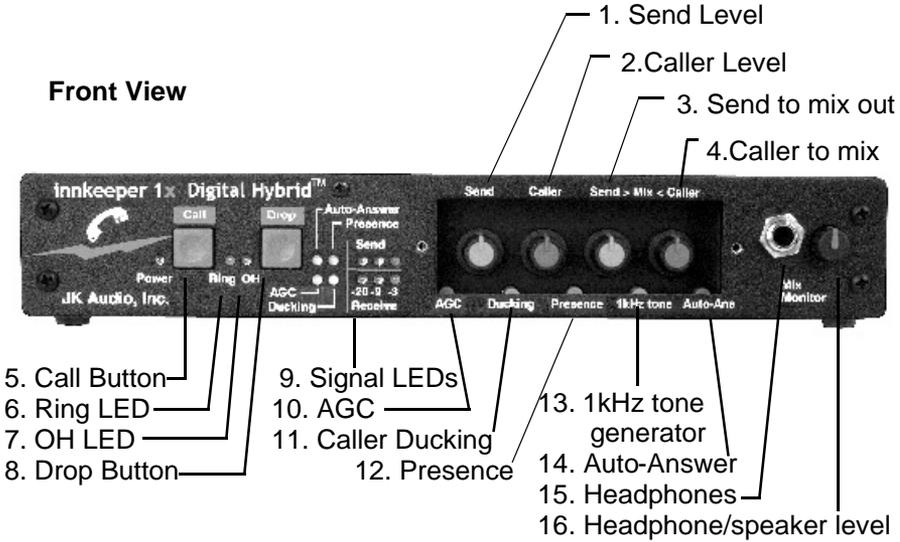

Back View

Features (continued)

1. Send Level - Adjusts the signal that you are sending down the telephone line.
2. Caller Level - Adjusts the level of the signal coming in from the telephone line, going out the "Caller" jack.
3. Send > Mix Level - Adjust the level of your audio that will be sent to the "Mix Out" jack.
4. Caller > Mix Level - Adjusts the level of caller audio that will be sent to the "Mix Out" jack.
5. Call Button - Press this button to answer or place a telephone call (takes the line off-hook).
6. Ring LED - Flickers when you have an incoming call.
7. OH LED - Lit when you are on line with a call (off-hook).
8. Drop Button - Press this button to drop (hang up) a call.
9. Signal LEDs - Send LEDs represent the signal level going out to the telephone line. Receive LEDs represent the signal level coming from the phone line, after the DSP.
10. AGC - press this switch to allow the innkeeper 1x to automatically adjust the gain of local and remote audio.
11. Caller Ducking - press this switch to lower the caller's audio level by 20 dB.
12. Presence - press this switch to boost the low end of the caller audio signal. Presence is added to the caller audio signal only.
13. 1 kHz tone generator - press this switch to send a 1kHz tone down the phone line.
14. Auto-Answer - Press this switch to enable the innkeeper to automatically answer an incoming call and then disconnect after the caller hangs up. Auto answer will occur on the first ring.

Features (continued)

15. Headphones - The stereo headphone jack contains the signal that you have created with the *send*> *mix level* and *caller*> *mix level* controls. Both left and right channels get the same signal.
16. Mix Monitor - Adjusts the mix signal level sent to the headphone and rear panel speaker terminals.
17. Send Input - Female balanced XLR input for signals going into the phone line. Mic or line level input.
18. Mix Output - Male balanced XLR output contains a mix of send and receive audio determined by the *send*> *mix level* and *caller*> *mix level* controls.
19. Caller Output - Male balanced XLR output contains only the callers voice.
20. Remote Control Jack - 8 pin modular jack for connection to the JK Audio Guest Module 1 Remote Keypad.
21. AC Power - Universal AC power input for 100-240 Volt, 50-60 Hz supply current.
22. Aux. Phone - Connect a single line analog telephone for call setup / dialing, or producer call screening.
23. Phone Line - Connect to a standard, single line, analog telephone line.
24. Mic / Line switch - Sets the front end sensitivity of the Send XLR jack. Set to *Mic* if you intend to plug a microphone directly to the Send jack. Set to *Line* if you are connecting to a mic mixer.
25. Remote Terminals - Screw terminals provide connections for a small loudspeaker, remote LEDs, tape recorder control, or console call control switches.

Connecting Cables

Although each application will require a slightly different setup, there are four cables that everyone can agree upon:

- Phone Line - Connect the supplied RJ-11 phone line cable between the jack marked "Line" and your wall jack. Be sure this jack can support standard analog telephone operation.
- Send Audio - Connect a microphone or mixing console output XLR cable to the Send jack on the innkeeper. Be sure to set the innkeeper mic/line switch to the proper position for your application
- Caller Audio - Connect the Caller Out jack to an input on your mixing console.
- Power - Connect the supplied AC power cord to the back of the innkeeper and then to an AC power outlet.

Your innkeeper is now ready to take calls. You may want to connect an auxiliary telephone to the innkeeper for call setup, or you can simply use Auto-Answer or the Call button to answer an incoming call.

Auxiliary Telephone

Innkeeper does not disconnect the auxiliary telephone when you press the call button. In fact, the DSP continuously monitors the telephone line to achieve maximum separation between transmit and receive signals. You can use an auxiliary telephone to place or screen a call, and then you can place the call on hold. When you are ready to take the call on innkeeper, simply press the call button. Your telephone will automatically release the hold while you talk. If you need to take the call back on the aux telephone, simply pick up the phone before the innkeeper drop button is pressed. If you would prefer the old world way of disconnecting the aux jack when the hybrid takes the call, please call us for details on a simple solution.

Send Signal Level

The Send LEDs display the signal level as it goes out over the phone line. The goal is to drive the phone line at high enough levels to avoid phone line noise, but not so loud as to cause excessive clipping.

Adjust the send level control until you see occasional flashes of the red -3dB peak Send LED. These flashes should occur during loud speech bursts. If the red LED stays lit for extended periods you can assume that much of your speech is being clipped or distorted. In this case you should back down on the Send volume control.

Receive Signal Level

The receive LEDs display the signal coming from the phone line and out of the DSP. The Caller level control does not change what you see on these LEDs. Adjust the Caller level control to give you the best signal at your equipment.

Presence

The Presence feature is a custom digital filter that boosts low frequencies in the 120Hz to 500Hz region to compensate for losses in the telephone network. This is a single ended algorithm that treats only the caller signal before it leaves the digital hybrid. You may notice that it has more of an effect on low pitched, or deeper voices.

Auto-Answer

The Auto-Answer feature will answer on the first ring. When Auto-Answer is enabled, you can still take calls manually using the call button. When finished, you can either drop the call manually or allow the call to Auto-Disconnect. innkeeper will look for a CPC disconnect signal or ROH message from the phone company to determine when a call has disconnected. This can take up to a minute.

Operation (continued)

AGC

When the Automatic Gain Control is used, innkeeper 1x automatically adjusts the levels of the talent and caller so neither is overpowering to the other. This only affects the outputs of the innkeeper 1x, not the signal sent to the caller through the phone line.

Caller Ducking

The Caller Ducking option can be used to temporarily drop the caller's voice by about 20 dB. This feature is especially useful when you need to regulate an obnoxious caller.

Dry Lines

innkeeper was designed to work on standard (wet) telephone lines as well as on custom pbx (dry) lines. Dry line installation is always a custom configuration and requires substantial telephone system knowledge. These installations are found in radio and television studios for both PBX and intercom applications.

Wet lines are typical tip / ring telephone lines that carry ring voltage, talk battery, and full duplex, balanced audio over two wires to an analog telephone. Dry lines carry the balanced, full duplex audio but without the ring voltage or talk battery.

innkeeper does allow dry line operation with a few limitations:

- If talk battery is not present when the Call button is pressed, a dry line is assumed.
- If talk battery suddenly appears during a "Dry Line" call, it becomes a wet line call, and auto-disconnect will occur when a disconnect signal occurs, or if talk battery disappears.
- Auto-answer does not work on a dry line.

The aux telephone jack will not support an analog telephone during a "Dry Line" call.

Operation (continued)

Rear Screw Terminals

- Speaker (+) Minimum 8 ohms, 1 watt max
- Speaker (-) Use together with terminal 1
- Ring LED Supplies +4.3 VDC, 40 mA pulse signal during incoming ring cycles.
- Chassis Ground
- OH LED Supplies +4.3 VDC, 40 mA steady signal during an active call.
- Call (NO) Pull this pin to ground momentarily to simulate pressing the Call button.
- Drop (NO) Pull this pin to ground momentarily to simulate pressing the Drop button.

Remote Control Jack

The RJ-45 type 8 pin jack on the back of the innkeeper is for connection to a JK Audio Guest Module 1 Remote Keypad.

The Guest Module 1 features:

- Ring and Call LEDs
- Call and Drop buttons
- DTMF Keypad
- Keypad disable switch

Also, when you dial using the Guest Module keypad, the tones are sent directly down the phone line, and do not come back blasting in your ear.

Contact your JK Audio dealer for additional information.

Specifications

Inputs

Mic / Line Female XLR 1k ohms, -10 mV RMS (-35 dBm nom.)

Mic / Line pad switch, Line = +5 dBm nominal

Outputs

Caller Out Male XLR 200 ohms, 500 mV RMS (+12 dBm Max.)

Mix Out Male XLR 200 ohms, 500 mV RMS (+12 dBm Max.)

Headphone 1/4" Stereo 8 ohms, 250 mW per channel

Speaker Screw Terminals 8 ohms, 1 watt

Phone Line

Connector RJ11C

Isolation 1500 VAC

Ringer 0.8B REN

Frequency Response, telephone side 200 Hz - 3600 Hz

Universal AC power input (120-240 VAC, 50-60 Hz)

1.75" x 7.3" x 10.5" (4.5 x 18.6 x 26.7 cm)

Weight: 5.2 Pounds

FCC Part 15 Compliance

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Changes or modifications not expressly approved by JK Audio can void the user's authority to operate the equipment.

FCC Registration

Your new JK Audio product has been registered with the Federal Communications Commission (FCC). This product complies with the standards in Part 68 of the FCC rules.

1.Connection and use with the nationwide telephone network

The FCC requires that you connect this telephone equipment to

FCC Registration (continued)

the national telephone network through a USOC RJ-11C modular telephone jack.

This equipment may not be used with Party Line Service or Coin Telephone Lines

This equipment is hearing aid compatible.

2. Information for the telephone company

Upon request from your local telephone company, you are required to provide the following information:

a) The "line" to which you will connect the telephone equipment (that is, your telephone number), and

b) The telephone equipment's FCC registration number. This can be found on the bottom of your telephone equipment, and,

c) the ringer equivalence number (REN) for this equipment.

The REN is used to determine the quantity of devices which will be connected to the telephone line. Excessive RENs on the telephone line may result in the devices not ringing in response to an incoming call. In most, but not all areas, the sum of the RENs should not exceed 5.0. To be certain of the number of devices that may be connected to the line, as determined by the total RENs, contact the local telephone company.

3. Repair Instructions

If it is determined that your telephone equipment is malfunctioning, the FCC requires that it not be used and that it be unplugged from the modular outlet until the problem has been corrected. Repairs to this telephone equipment can only be made by the manufacturer or its authorized agents or by others who may be authorized by the FCC. For repair procedures, follow the instructions outlined under the warranty section of the manual.

4. Rights of the telephone company

If telephone equipment is causing harm to the network, the telephone company may temporarily discontinue your telephone service. If possible, they'll notify you before they interrupt service. If advanced notice isn't practical, you'll be notified as soon as possible. You'll be given the opportunity to correct the problem, and you'll be informed of your right to file a complaint with the FCC.

Your telephone company may make changes in its facilities, equipment, operations or procedures that could affect the proper functioning of your JK Audio product. If such changes are planned, you'll be notified by your telephone company.

Warranty

Innkeeper 1x is covered by a 2-year warranty to be free from defective workmanship and materials. In the event that the Innkeeper 1 needs repair, you must call us to get an authorization, and then carefully pack and ship it to us. You will pay for shipping to us and we will pay for return back to you, UPS ground. No free repairs will be made if the defect was caused by misuse, weather conditions, or other cause, except for defective workmanship or materials. THERE ARE NO EXPRESS OR IMPLIED WARRANTIES WHICH EXTEND BEYOND THE WARRANTY HERE MADE.

2/00

JK Audio Inc.

2701 N. 45th Road, Sandwich, IL 60548 (815) 786-2929